



9 IN TAMIYA INSTRUCTIONS ON PAGE 14, IN STEP 31 - USE ONLY PARTS J26 AND J25

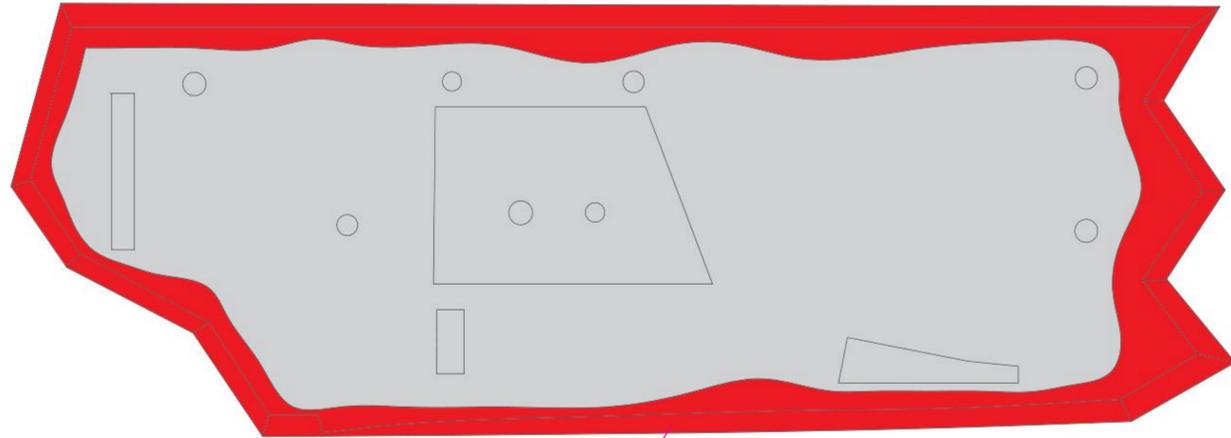

REDUCE THICKNESS TO 0.2 MM

10 GLUE TOGETHER J25 AND J26 IN THE POSITION OF CLOSED FLAPS

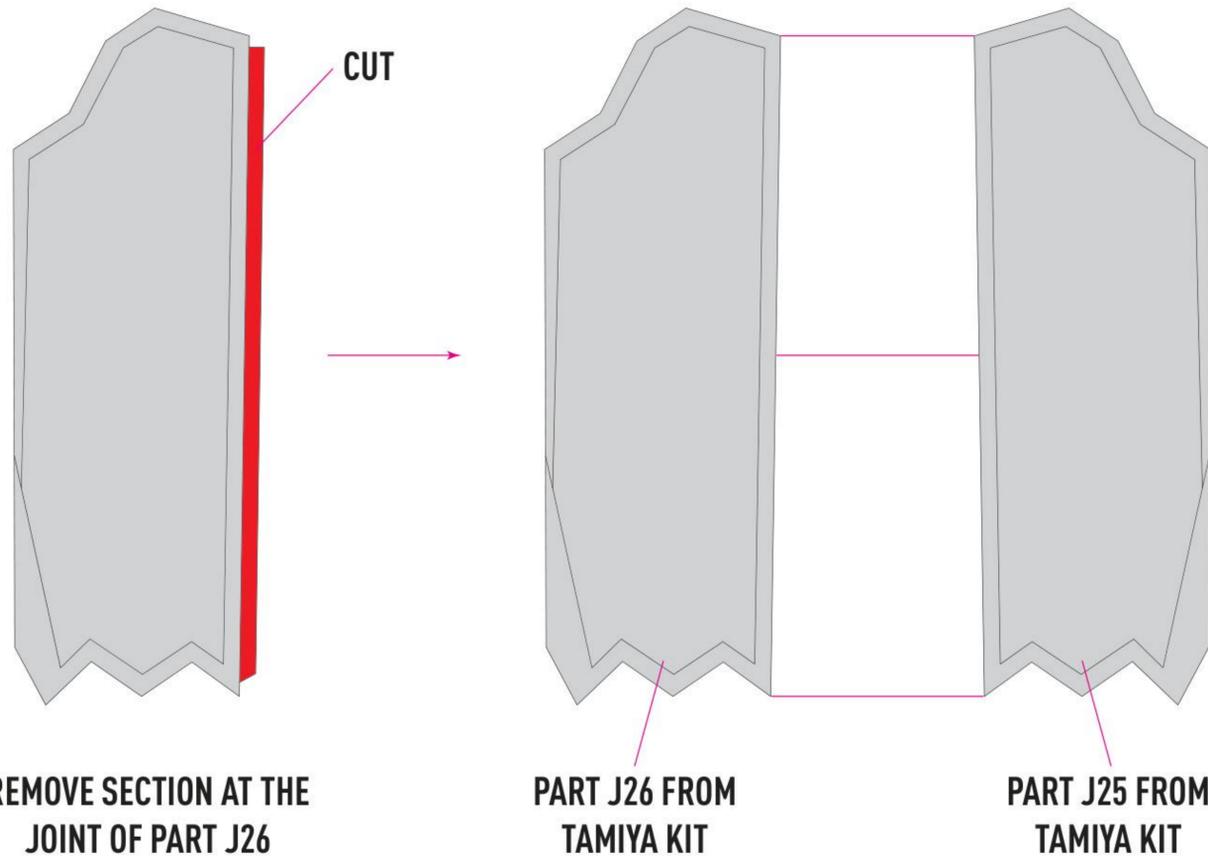


REMOVE SECTION AT THE JOINT OF PART J26


PART J26 FROM TAMIYA KIT

PART J25 FROM TAMIYA KIT


DETAILS AFTER REMOVAL FROM SUPPORTS

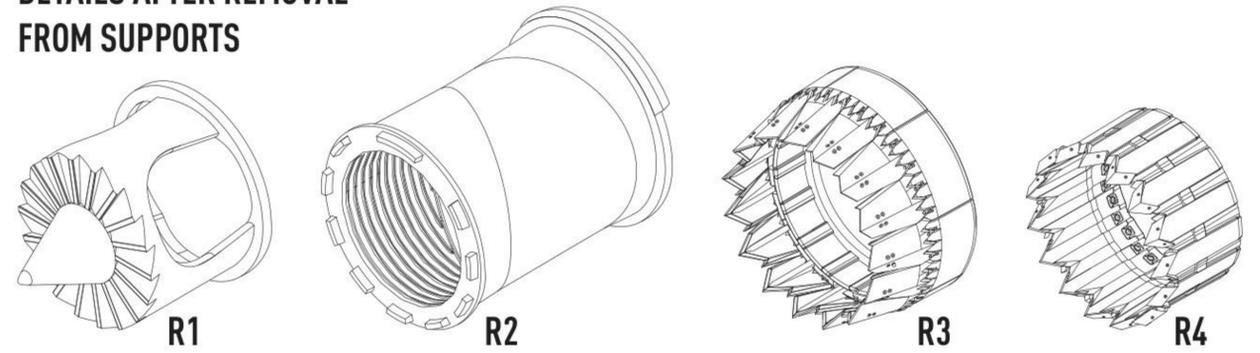


1 IN TAMIYA INSTRUCTIONS ON PAGE 9, IN STEP 17 - ON PARTS H24 AND H23, CUT OFF SELECTED AREAS AND USE THE UPPER PART. DO NOT USE PART H35.

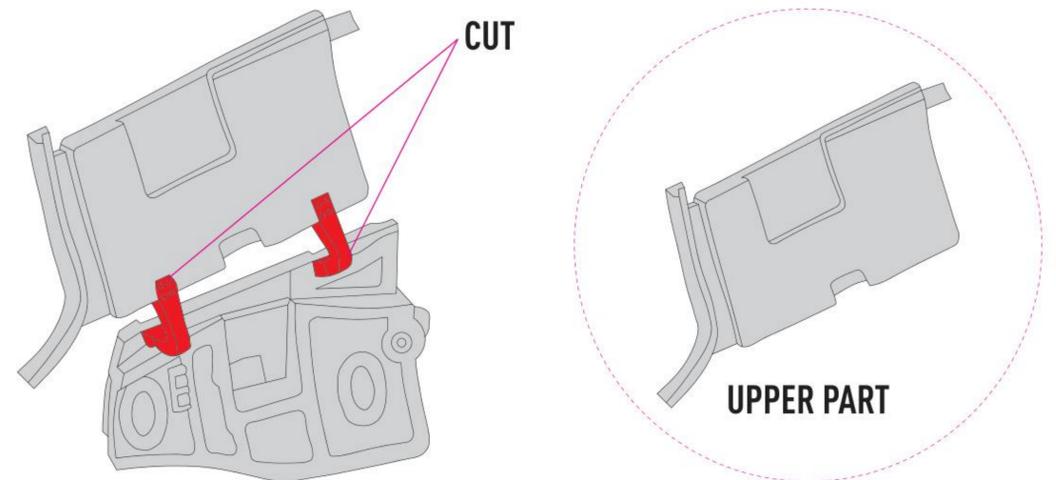

2 REDUCE THICKNESS TO 0.2 MM

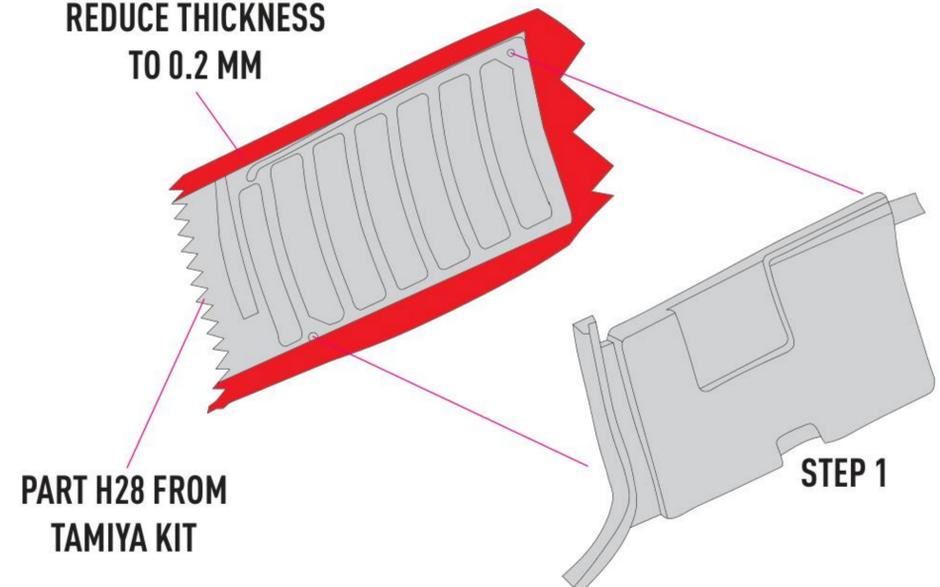


3 GLUE TOGETHER H28 AND H27 IN THE POSITION OF CLOSED FLAPS

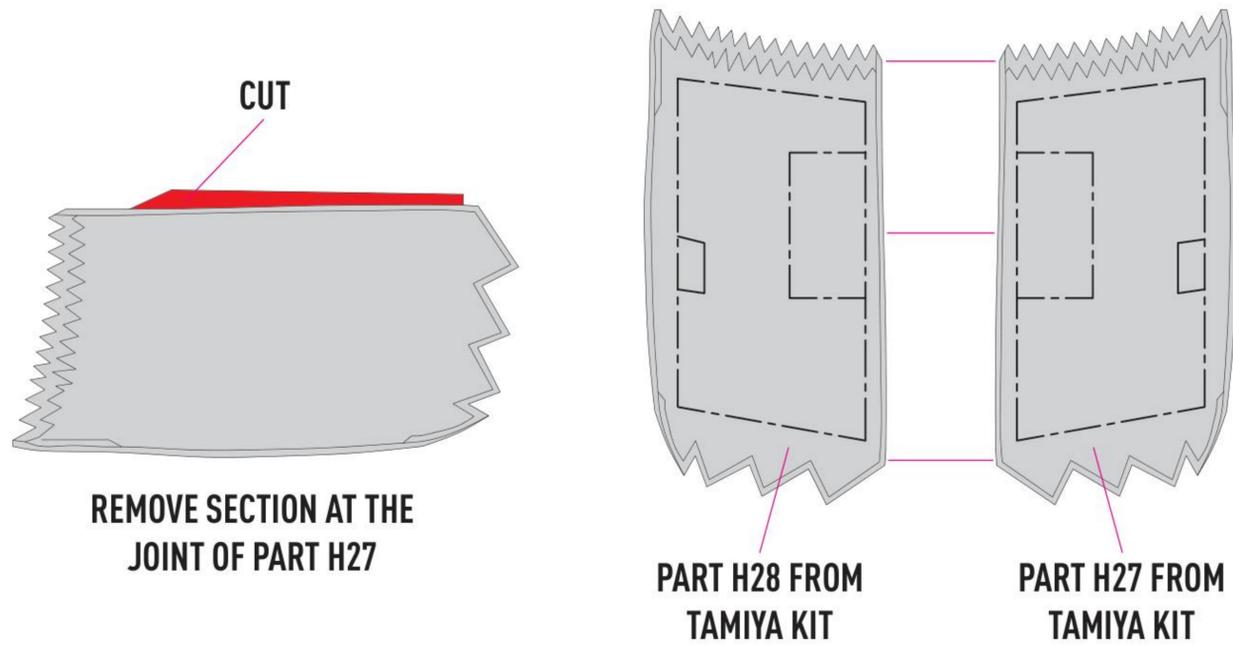


4 IN TAMIYA INSTRUCTIONS ON PAGE 9, IN STEP 18 - REPLACE R AND L NODES WITH CONSTRUCTION FROM STEP 3


5 IN TAMIYA INSTRUCTIONS ON PAGE 7, IN STEP 13

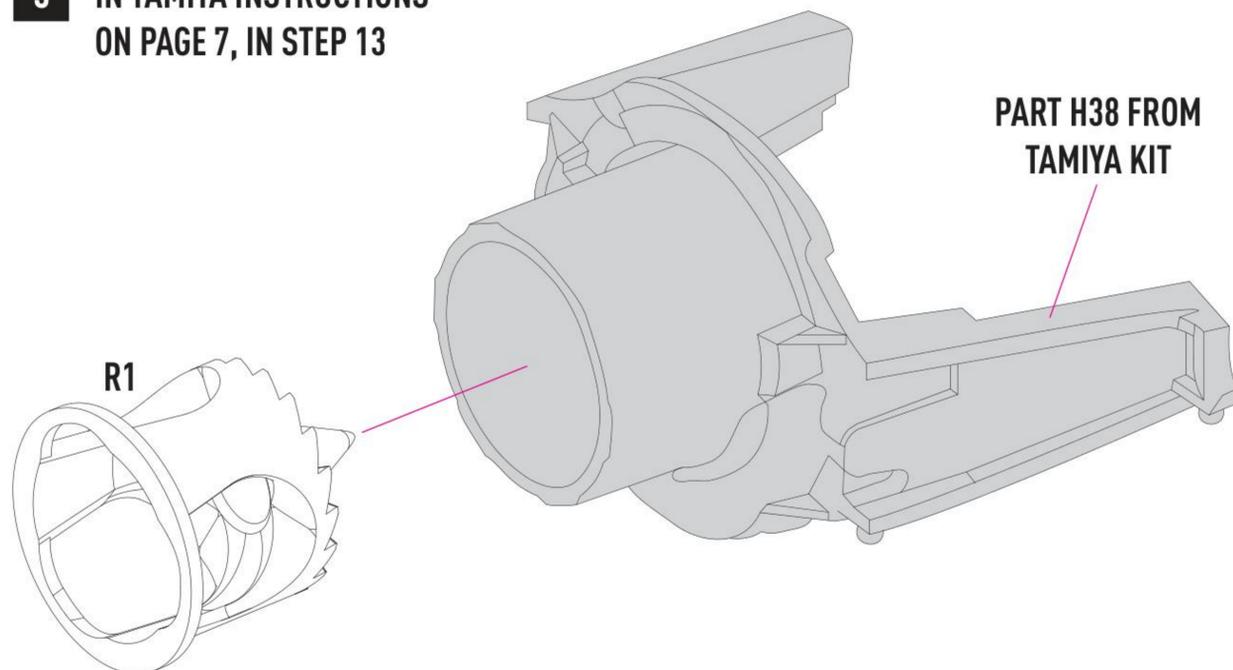

6

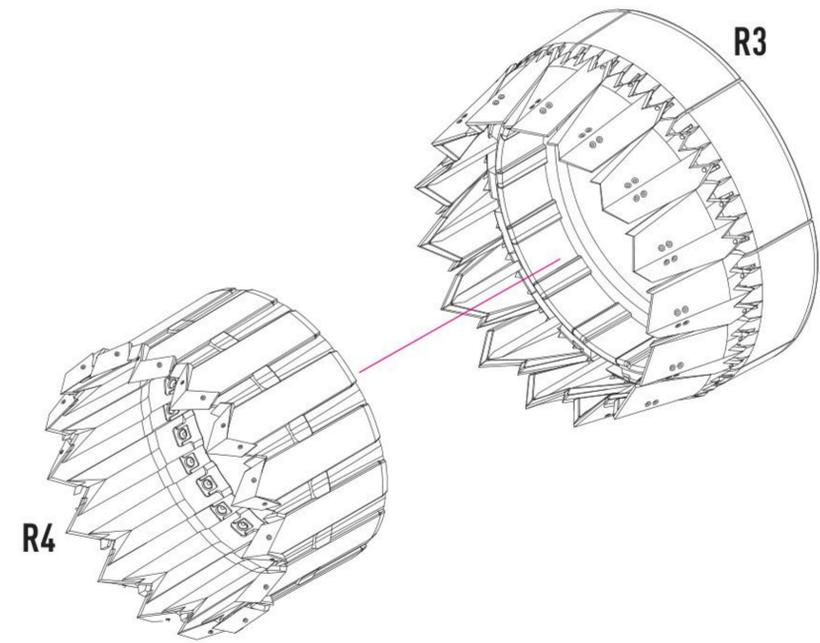

7

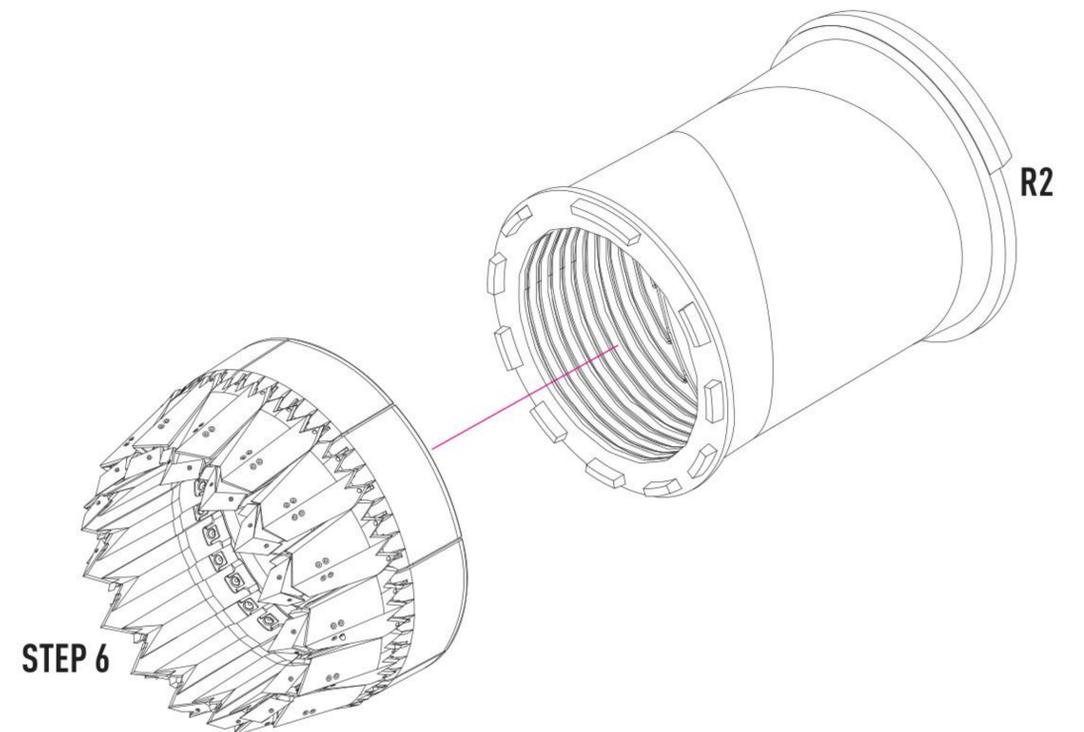

8 IN TAMIYA INSTRUCTIONS ON PAGE 9 AND 10, IN STEP 19 AND 20 - REPLACE STANDARD PARTS WITH CONSTRUCTION FROM STEP 7